Portable Smart Multi-functional Jump Starter T8

Product Specification:

Product Name	Portable Smart Jump Starter T8		
Product Mode	T8		
Nominal Voltage	12V		
Nominal Capacity	13800mAh		
Virtual Capacity	7800mAh	9900mAh	11000mAh
Power	51.06Wh		
Start Current	300A		
Start Peak Current	600A(3S)		
Input	CC/CV 15V/1A		
USB Output (Mobile Charge)	5V/2.1A		
DC Output (Laptop Charge)	5V/12V/16V/19V		
Fully Charged Time	About 6 hours		
LED Flashlight	66 LM		
USB Port	5V 2.1/1A		
Cycle Life	1000 times		
Dimension	168mm*90mm*36mm		

Web: http://www.sm1smart.com

Tel: +86 4009944811

Weight	426g
Working Temperature	-20℃~+60℃
Application	Start the Gasoline Vehicles under 3.0T

Description:

Portable Smart Jump Starter

- Smart Sleep Moed
- Smart Fast Charge
- Import Cells
- Simply Charge and Discahrge
- 13800mAh

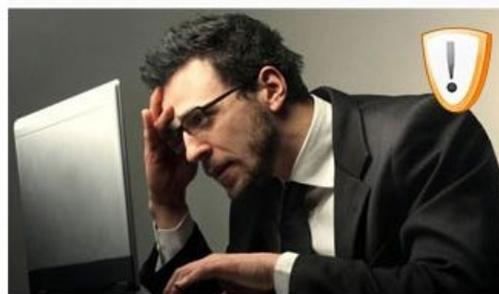**You may need under these situations**

Forget to turn off the lights, battery depletion

A world of ice and snow Unable to start the car

The emergency call, Mobile phone has no electricity

In an emergency, Compuiter no electricity

Web: http://www.sm1smart.com

Tel: +86 4009944811

Application:

1. Digital Products Charging

2. LED Emergency Lighting

3. Jump Starting

Operation:

Charging in for the device

1. Plug the AC adapter to the AC electrical socket

2. Insert the adapter plug into the 15V input port to the device

Or

1. Insert the car charger into the car cigar port

2. Insert the other end of the car charger to the 15V input port of the device

Red clamp connect "+"
Black clamp connect "-"

The plug connect
the jump starter

Start the vehicle

Remove the plug from
the jump starter

Remove the clamps
from the battery

Starting 12V Cars

1. Make sure two or more power indicator lights are on.

2. Connect the red battery clip to the battery positive pole (+) and black clip to the battery negative pole (-)

3. Insert the battery clips plug into the "car jump port" of the device

4. Start the car

5. Pull out the battery clip plug from the "car jump port" of the device

Web: http://www.sm1smart.com

Tel: +86 4009944811

6. Disconnect the red and black battery clip from the battery positive and negative poles.

Charging for Mobile Phone Products

1. Choose the appropriate mobile charging adapter with the charging cable

2. Plug the USB port of the charging cable into the USB 5V output port of the device

3. Connect the mobile charging adapter to your mobile phones

4. Press the power switch and charging begins

Note: The USB indicator light will keep bright when charging if it doesn't charge for mobiles more than 3 seconds, the USB indicator light will automatically turn off.

Trouble Shooting

If the following operation can't solve the product problem, please stop using the device and contact the supplier.

Situation	Reason	Operation
When press the power switch, there is no reply	The product voltage is too low, and it starts the low-voltage protection to cut off the output	Insert the charger into the 15V input port to activate it.

Warning:

● When starting the car, please firmly and correctly insert the blue plug of battery clip to the device, otherwise, it will affect the starting function, what's worse, the plastic of the battery clips would be melt.

● If fail to start the car, please check whether the battery clips are connected, or whether the battery connectors are rusty or contaminated. If so, please clean it.

　After trying three-times failing of starting, please stop starting. Or it may damage the car, it should be checked other problems.

● Don't directly connect the two battery clips, it will cause safety accident.

● Don't disassemble the device by your own, it may cause safety accident.

●　If disassemble the device by your own, the warranty will be invalid.

Accessories:

Jump starter Accessory

1. High safety battery clips
2. Four-in-one charge cable
3. Standard car charger
4. Adapter
5. Laptop charger

Trouble Shooting

If the following operation can't solve the product problem, please stop using the device and contact the supplier.

Situation	Reason	Operation
When press the power switch, there is no reply	The product voltage is too low, and it starts the low-voltage protection to cut off the output	Insert the charger into the 15V input port to activate it.

Web: http://www.sm1smart.com

Tel: +86 4009944811

Warning:

- When starting the car, please firmly and correctly insert the blue plug of battery clip to the device, otherwise, it will affect the starting function, what's worse, the plastic of the battery clips would be melt.

- If fail to start the car, please check whether the battery clips are connected, or whether the battery connectors are rusty or contaminated. If so, please clean it.

  After trying three-times failing of starting, please stop starting. Or it may damage the car, it should be checked other problems.

- Don't directly connect the two battery clips, it will cause safety accident.

- Don't disassemble the device by your own, it may cause safety accident.

- If disassemble the device by your own, the warranty will be invalid.

Warranty Instruction:

- Quality issues come out under normal using is in the warranty range.

- Damages caused with the wrong operation are out the warranty, which will be invalid.

- If users disassemble the device by your own, then the warranty will be invalid.

- If you tear off the mark on the device, then the warranty will be invalid.

Packaging & Shipping:

- Packaging Details: OEM/ODM packing

- Delivery Detail: 5-15 working days

- Payment terms: Western Union, T/T

- Shipping terms: UPS, DHL, TNT, FedEx

Company Profile:

Yangzhou Ximai Smart Technology Co., Ltd.

was established in 2003. It is a high-tech

enterprise dedicated to the innovation and

development of new energy— lithium battery

Web: http://www.sm1smart.com

Tel: +86 4009944811

applications. We are mainly engaged in the customized R&D, manufacture and sale of three series of products including "lithium battery applied to industry", "lithium battery for portable digital products" and "lithium battery for mining and military".

Our Factory

Certifications:

- CE
- RoHS
- ISO9001