

Smart Multi-functional UPS



Product Specification:


| | | | |
|--------------------------|----------------------------|--------------|--------------|
| Product Name: | Smart Multi-functional UPS | | |
| Model NO | FCY14c3a | | |
| Power | 348W | 404W | 520W |
| Capacity | 94Ah | 109Ah | 140Ah |
| Dimension | 50*158*220mm | 50*158*260mm | 50*158*320mm |
| Output Voltage | 5V,9V,12V,16V,19V,24V | | |
| Output Current | MAX 5A | | |
| EC5 Output Voltage Range | 9-12.6V | | |
| EC5 Output Current Range | Standard Current: < 100A | | |
| | Maximum Current: < 499A | | |
| Auto Ignition | YES | | |
| USB Output | DC5V/2.1A | | |
| Voltage Input | 12-24V/5A | | |
| DC Output Socket | Φ5.5*2.1mm | | |
| DC Input Socket | Φ5.5*2.5mm | | |

Web: <http://sm1smart.com/>

Tel: +86 4009944811

| | |
|-----------------------------------|---------------------|
| Charging Temperature | 0-45°C |
| Discharging Temperature | -20-60°C |
| Overcharging Protection | YES |
| Over-discharging Protection | YES |
| Over-current Protection | YES |
| Over-temperature Protection | YES |
| Short Circuit Protection | YES |
| Battery Equalization | YES |
| Recycle Life | more than 500 times |
| Storage Relative Humidity | 65±20%°C |
| Storage Atmospheric Pressure | (86-106)Kpa |
| Efficiency of Controlling Voltage | over 90% |
| Storage Temperature | (20-30)°C |

Application:

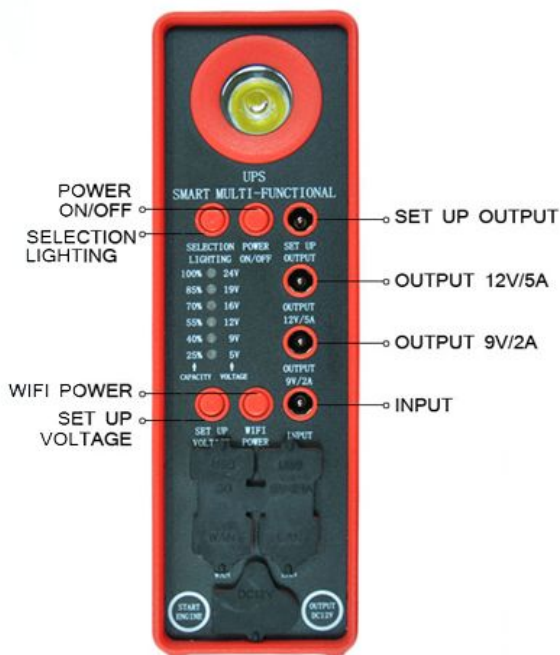

1. Connect to the ADSL or router via a WAN cable interface, PC, IPAD, mobile phone and other digital products can be wireless internet access.

2. Insert 3G card into the 3G interface, a multi-purpose network and Wi-Fi in suburbs can be realized.

3. In the suburbs and night, LED lighting, warning lights and emergency signal lamp can work.

4. USB 5V can offer power for all digital products.

5. With different voltages, DC can charge for different PC, mobile phone, camera and so on.

6. Use EC5 interface to offer power when vehicle battery is dead and you cannot turn over the engine to start it.

7. 220v device need battery, you only need insert inverter into EC5 interface, then insert your device into inverter.

8. When out of power, via the power adapter, the power bank can be charged from car and solar panel.

Accessory list:



(1) Smart multi-function ups: 1 set

(2) Charger: 1piece

(3) Battery Terminal: 1 piece

(4) Inverter: bring your own

(5)Cable: 2 pieces

(6) Adapter: 31 pieces

(7) Cigarette lighter: 1piece

(8) Car charger: 1 piece

(9) Instruction: 1 piece

Packaging & Shipping:

Packaging Details: OEM/ODM packing

Delivery Detail: 5-15 working days

Payment terms: Western Union, T/T

Shipping terms: UPS, DHL, TNT, FedEx

Company Profile:

Smart Technology Co., Ltd. was established in 2003. It is a high-tech enterprise dedicated to the innovation and development of new energy— lithium battery applications. We are mainly engaged in the customized R&D, manufacture and sale of three series of



products including “lithium battery applied

to industry”, “lithium battery for portable digital products” and “lithium battery for mining and military” .